HYAGRO

GARDEN AND FARM MACHINES

ACCEPT OEM

Professional garden tools manufacturer

Factory price / High quality / Professional quick services















Susan Li
Sale Manager

+86 15356426639

Mobile/Whatsapp/Wechat: +86-15356426639

susan426639@gmail.com

Factory Address: 1046 mold base, No 8, gaodengbao Road, Taizhou, Zhejiang, China.

Whatsapp scan here

Wechat scan here

CHAINSAWS

POWERFUL • RELIABLE • EFFICIENT



Model: HY5200

TECHNICAL PARAMETERS			
Displacement	52cc	Guide Bar Size	18"/20"/22"
Rated Power	2.2kw/8500rpm	Idle Speed	3300rpm±200
Engine	2 Stroke Engine		



Model: HY4500

TECHNICAL PARAMETERS			
Displacement	52cc	Guide Bar Size	18"/20"/22"
Rated Power	2.2kw/8500rpm	Idle Speed	3100rpm±200
Engine	2 Stroke Engine		



Model: HY4500

TECHNICAL PARAMETERS			
Displacement	52cc	Guide Bar Size	18"/20"/22"
Rated Power	2.2kw/8500rpm	Idle Speed	3100rpm±200
Engine	2 Stroke Engine		



Model: HY3800

TECHNICAL PARAMETERS			
Displacement	38cc	Guide Bar Size	16"
Rated Power	1.6kw/6500rpm	Idle Speed	3100rpm±200
Engine	2 Stroke Engine		



HYAGRO

CHAINSAWS

POWERFUL • RELIABLE • EFFICIENT



Model: HY5200

TECHNICAL PARAMETERS			
Displacement	52cc	Guide Bar Size	18"/20"/22"
Rated Power	2.2kw/8500rpm	Idle Speed	3300rpm±200
Engine	2 Stroke Engine		



Model: HY5800

TECHNICAL PARAMETERS			
Displacement	58cc	Guide Bar Size	18"/20"/22"
Rated Power	2.7kw/8500rpm	Idle Speed	3300rpm±200
Engine	2 Stroke Engine		



Model: HY5200

TECHNICAL PARAMETERS			
Displacement	52cc	Guide Bar Size	18"/20"/22"
Rated Power	2.2kw/8500rpm	Idle Speed	3300rpm±200
Engine	2 Stroke Engine		



Model: HY5800

TECHNICAL PARAMETERS			
Displacement	58cc	Guide Bar Size	18"/20"/22"
Rated Power	2.7kw/8500rpm	Idle Speed	3300rpm±200
Engine	2 Stroke Engine		



Model: HY070

TECHNICAL PARAMETERS			
Displacement	105.7cc	Guide Bar Size	30"/36"/42"
Rated Power	4.8kw/8000rpm	Idle Speed	8000rpm±200
Engine	2 Stroke Engine		



Model: HY180

TECHNICAL PARAMETERS			
Displacement	31.8cc	Guide Bar Size	18"/20"
Rated Power	1.5kw/2800rpm	Idle Speed	2800rpm±200
Engine	2 Stroke Engine		



Model: HY250

TECHNICAL PARAMETERS			
Displacement	45.5cc	Guide Bar Size	18"/20"
Rated Power	2.2kw/2800rpm	Idle Speed	2800rpm±200
Engine	2 Stroke Engine		



Model: HY381

TECHNICAL PARAMETERS			
Displacement	72cc	Guide Bar Size	18"/20"/22"/24"
Rated Power	3.6kw/2800rpm	Idle Speed	2800rpm±200
Engine	2 Stroke Engine		



1E32FL



1E34F



1E36F



1E36F-2/1E40F-5A/1E44F-2A



TB33/TB43/TB52

Model	1E32FL	1E34F	1E36F	1E36F-2/1E40F-5A/1E44F-2A	TB33/TB43/TB52
Max.Power (KW/r/min)	0.65/7500	0.75/7500	0.81/6000	0.91/1.25/1.4/6500	0.91/1.25/1.4/6500
Discharging Capacity (CC)	22.5	25.4	30.5	32.6/42.7/51.7	32.6/42.7/51.7
Cylinder Diameter (mm)	32	34	36	36/40/44	36/40/44
Fuel Ratio	25:1	25:1	25:1	25:1	25:1
Fuel Tank Capacity (L)	0.6	0.65	1.2/2	0.95/1.3/1.3	0.8/1/1.1
N.W. (kg)	2.5	2.4	2.9	3.4/4.2/4.3	3.4/4.2/4.3
Carton Size (cm)	26*18*22	24*22*25	23*20*20	27*24*25	30*28*25

发动机 GASOLINE ENGINE



G45L



1E40F-6M



1E40F-6



TU43 TU52



TJ45E/TJ53E

Model	G45L	1E40F-6M	1E40F-6	TU43 TU52	TJ45E/TJ53E
Max.Power (KW/r/min)	1.47/6500	1.45/7000	1.45/7000	1.21/6500	1.21/6500
Discharging Capacity (CC)	41.5	40.2	40.2	42.7/51.7	45.4/53.2
Cylinder Diameter (mm)	40	40	40	40/44	42.5/44
Fuel Ratio	25:1	25:1	25:1	25:1	25:1
Fuel Tank Capacity (L)	0.75	1	1	0.9/1.1	0.9/1.1
N.W. (kg)	3.6	3.9	3.9	4.1/4.3	3.9/4.5
Carton Size (cm)	25*20*28	30*31*21	30*31*21	30*28*25	21*29*28

发动机 GASOLINE ENGINE



139F-2



GX35 140FA



EHD035A



144F



170F

型号Model	139F-2	GX35 140FA	EHD035A	144F	170F
最大功率Max.Power（KW/rimin）	0.8/6500	1.0/6500	0.88/7500	1.5/6800	3.7/3600
排量Discharging Capacity（CC）	33.5	37.7	33.5	53.2	163
缸径Cylinder Diameter（mm）	39	40	39	40	68
燃油比Fuel Ratio	/	/	/	/	/
油箱容积Fuel Tank Capacity（L）	0.65	0.7	0.65	1.2	3.6
净重N.W.（kg）	3.8	3.9	3.7	5.5	14.1
纸箱尺寸Carton Size（cm）	23*20*30	24*21*27	20*24*25	30X24x34	40*33*37



BG328



BG330T/BG430T/BG520T



BG435



型号MODEL：		BG328	BG330T/BG430T/BG520T	BG435
发动机MATCHED ENGINE:		1E36F	TB33/TB43/TB52	140FA
最大功率MAX. POWER(KW/rimin):		0.81/6000	0.91/.25/1.4/6500	1.0/6500
排量DISPLACEMENT(cc):		30.5	32.6/42.7/51.7	37.7
燃油比例XD FUEL RATIO:		25:1	25:1	NO
油箱容积FUEL TANK CAPACITY(L):		1.3	1.3	0.7
切割宽度CUTTER WIDTH(mm):		415	415	415
刀片长度BLADE LENGTH(mm):		255(3T)/305(2T)	255(3T)/305(2T)	255(3T)/305(2T)
净重NET WEIGHT(kg):		9	10.5	10
分体包装SEPARATE PACKAGE(mm)	发动机ENGINE:	280*270*410	310*300*420	350*300*430
	杆SHAFT:	1375*90*75	1550*105*105	1380*90*75
装柜数量LOADING QTY(1*20FT):		740	550	570
二冲发动机2 STROKE ENGINE		●	●	
四冲发动机4 STROKE ENGINE				●





CG143R-II



TB330/TB430/TB520



CG330/CG430/CG520


型号MODEL		CG143R-II	TB330/TB430/TB520	CG330/CG430/CG520
发动机MATCHED ENGINE:		G45L	TB33/TB43/TB52	1E36F-2/1E40F-5A/1E44F-2A
最大功率MAX. POWER(Kw/rmin):		1.6/6500	0.9/1.25/1.4/6500	0.9/1.25/1.4/6500
排量DISPLACEMENT(cc):		41.5	32.6/42.7/51.7	32.6/42.7/51.7
燃油比例MIXED FUEL RATIO:		25:1	25:1	25:1
油箱容积FUEL TANK CAPACITY(L):		0.75	0.8/1.1/1.1	1.2
切割宽度CUTTER WIDTH(mm):		415	415	415
刀片长度BLADE LENGTH(mm):		255(3T)/305(2T)	255(3T)/305(2T)	255(3T)/305(2T)
净重NET WEIGHT(kg):		8.5	7.2/7.3/7.4	7.7/7.1/7.2
分体包装 PACKAGE(mm):	发动机ENGINE:	250*185*280	320*235*345	320*235*345
	杆SHAFT:	1590*110*100	1590*110*100	1590*110*100
整体包装OVERALL PACKAGE(MM):		1790*290*280/120	1790*290*280/120	1790*290*280/120
装柜数量LOADING QTY(1*20FT):		680/300	680/300	680/300
二冲发动机 2 STROKE ENGINE		●	●	●

HYAGRO
割草机 BRUSH CUTTER



ELT-212



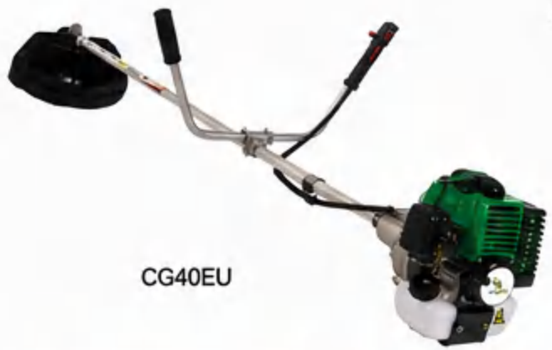

CG40EU



CG411M

型号MODEL		CG411M	CG40EU
发动机MATCHED ENGINE:		1E40F-6M	40EU
最大功率MAX. POWER(Kw/rmin):		1.45/7000	1.2/6500
排量DISPLACEMENT(cc):		40.2	39.8
燃油比例MIXED FUEL RATIO:		25:1	25:01:00
油箱容积FUEL TANK CAPACITY(L):		1	1.1
切割宽度CUTTER WIDTH(mm):		415	415
刀片长度BLADE LENGTH(mm):		255(3T)/305(2T)	255(3T)/305(2T)
净重NET WEIGHT(kg):		7.2	8.7
分体包装 PACKAGE(mm):	发动机ENGINE:	300*260*290	320*235*345
	杆SHAFT:	1590*102*102	1590*110*100
整体包装OVERALL PACKAGE(MM):		1790*290*280/120	1790*290*280/120
装柜数量LOADING QTY(1*20FT):		720	710/300
二冲发动机 2 STROKE ENGINE		●	●

型号MODEL	ELT-212
电压VOLTAGE:	12V/24V/48V
功率POWER:	600W
转速SPEED:	4500R/MIN
工作时间WORKING TIME:	2/4/6H
刀片长度BLADE LENGTH(MM):	255(3T)/305(2T)
净重/毛重N.W./G.W.:	3.6/5.9
包装尺寸PACKAGE SIZE(MM):	1070*295*200
装柜数量LOADING QTY(1*20FT):	506

吹风机/吹吸机 BLOWER AND VACUUM



EB260



EB650



EBV260 BLOWER & VACUUM



型号Model:	EB260	EBV260	EB650
发动机Matched Engine:	1E34FB	1E34FB	1E48FP
平均风量Average Air Volume(m3/s):	0.13	0.13	0.3
排量Displacement(mm):	25.4	25.4	63
最大功率Max.Power (kw/r/min):	0.75/7500	0.75/7500	2.7/6800
油箱容量Fuel Tank Capacity(L):	0.5	0.5	1.8
化油器Form of Carburetor:	Diaphragm	Diaphragm	Diaphragm
净重Net Weight(kg):	4.2	5.6	10.5
纸箱尺寸Carton Size (mm):	402*242*352	585*295*395	520*390*570
装柜量Loading Qty.(1*20"):	760	370	240

地钻 EARTH AUGER



DZ52 DZ63





DZ52A DZ63A



ONE WHEEL EARTH AUGER WD252 WD263



FRAME EARTH AUGER FDZ52 FDZ63

型号Model:	DZ52/DZ63	DZ52A/DZ63A	WDZ52A/DZ63A	FDZ52A/DZ63A
发动机Matched Engine:	1E44F-2A/1E48F	1E44F-2A/1E48F	1E44F-2A/1E48F	1E44F-2A/1E48F
排量Displacement(cc):	51.7/63.3	51.7/63.3	51.7/63.3	51.7/63.3
混油比Mixed Fuel Ratio:	25:1	25:1	25:1	25:1
减速比Reduction Ration:	40:1	40:1	40:1	40:1
钻头直径Bit Diameter(mm):	150-200	150-200	150-200	150-200
油箱容量Tank Capacity(L):	1.3/1.8	1.3/1.8	1.3/1.8	1.3/1.8
额定功率Standard Power(kw/r/min):	1.4/6500;2.7/6800	1.4/6500;2.7/6800	1.4/6500;2.7/6800	1.4/6500;2.7/6800
净重NET Weight(kg):	13/14	13.5/14.5	21.5/22.5	22/23
发动机包装尺寸Engine Package Dimension(mm):	395*345*285	490*370*310	870*180*450	320*230*350
架子包装尺寸FRAME Package Dimension(mm):	—	—	330*340*400	1150*570*550
钻头包装尺寸Auger Package Dimension(mm):	800*210*210	800*210*210	800*210*210	1000*600*700
装柜数量Loading Qty.(1*20"):	390	310	261	100

一机多用 高效作业

ONE POWERHEAD, 12 FUNCTIONS
WORK SMARTER, DO MORE








强劲动力 POWERFUL ENGINE
快速更换 QUICK CHANGE
坚固耐用 BUILT TO LAST
多种功能 MULTI-FUNCTIONAL
便捷收纳 EASY STORAGE

多功能机 MULTI-TOOLS 12 IN 1
HYAGRO


防护罩
SHIELD


导向轮组件
WHEEL KIT


打草头
TRIMMER HEAD


三齿刀片
3-TOOTH BLADE


松土刀
TILLER


角度传动箱
GEAR BOX


割草刀
GRASS BLADE


旋耕刀（宽）
ROTARY TILLER (WIDE)


旋耕刀（窄）
ROTARY TILLER (NARROW)

型号MODEL:	DGJ330/430/520
发动机 MATCHED ENGINE :	1E36F-2A/1E40F-5A/1E44F-2A
排量 DISPLACEMENT (CC):	0.9/1.25/1.4/6500
最大功率 MAX. POWER (kw/r/min):	32.6/42.7/51.7
燃油比例 MIXED FUEL RATION:	25:1
油箱容量 FUEL TANK CAPACITY (L):	0.95/1.3/1.3
发动机包装尺寸 ENGINE PACKAGE SIZE (MM):	320X235X345
杆包装尺寸 SHAFT PACKAGE SIZE (MM):	1650X150X110
净重 NET WEIGHT (KGS):	10~16

手动/电动喷雾器
MANUAL SPRAYER / ELECTRIC SPRAYER



MANUAL SPRAYER MS-16



MANUAL SPRAYER MS-20



BATTERY SPRAYER BS-18



型号/Model	MS-16	MS-20	BS-18 Electric only	BS-18 2 in 1
容量Capacity:	16L	20L	18L	18L
压力Pressure:	0.2-0.4Mpa	0.2-0.4Mpa	0.2-0.4Mpa	0.2-0.4Mpa
尺码Dimension（CM）:	38x18x52	40x19x54	38*21*47.5	38*21*47.5
包装数量QTY:	1PC/CTN	1PC/CTN	1PC/CTN	1PC/CTN
桶厚Tank's Thickness（MM）:	2.4*4.0	2.4*4.1	2.3*4.0	2.4*4.0
重量WEIGHT（KGS）:	3.13	3.2	5.5	6
装柜量Loading QTY (1*40HQ):	2050PCS	1550PCS	1800PCS	1800PCS



型号/Model	BS-4/BS-5
容量Tank Capacity	4L/5L
电池Lithium battery	24V10AH
工作时长Working time	1h
功率Power	340W
转速Rotate speed	2W/MIN
最大流量Flow Rate（Max）	70ml/min
雾滴尺寸Droplet Size	10-150 micron adjustable
喷洒范围Horizontal Rage	8-15m
包装尺寸Dimension（CM）	50x27x29
重量Gross Weight	7.6.8kg

动力喷雾器
POWER SPRAYER



3WZ-767





3WF-3



名称NAME	动力喷雾器 Power Sprayer		烟雾机Fogging Machine	120K/180K
型号Model	3WZ-767	3WF-3	药箱容量Capacity of Chemical Tank	8Lx2
容量Capacity:	20/25L	14/20/26L	油箱容量Capacity of Fuel Tank:	2.0L/2.5L
最大流量Max Flow	≥6LMIN	≥12	电池Power:	锂电池Lithium battery
喷射距离Range(m):	—	/	发动机管Engine Pipe:	70*32
最大压力Max Pressure:	2.5MPA	/	点火器Igniter:	锂电池专用lithium dedicated
发动机Matched Engine:	TU26	1E40F-3Z	架子材质Frame Material:	304不锈钢304 stainless steel/钛合金Titanium stainless steel
最大功率Max Power:kw/r/min	0.75/7500	2.13/7500	爆发管材质Engine Pipe Material:	304不锈钢304 stainless steel/316不锈钢316 stainless steel
排量Displacement:CC	25.4	41.5	排量Displacement:	48CC/56CC
排量WIElacerent:CC	25.4	11/11.2/11.5	流量Flow Rate:	1.5/2.0L/h
流量WEIGHT:KGS	11.5/12	11/11.2/11.5	油耗Fuel Consumption:	2.6/3.0L/h
纸箱尺寸Carton Size:CM	49*37*66	49*40*75CM	启动类型Start Model:	Electric & manual手启动&电启动
装柜量Loading QTY（1*20FT）:	378	210/200/160	化油器结构Carburetor Structure:	自吸化油器Self-suction carburetor
			重量Weight	11.5/10.5kg
			包装尺寸Package	1050x260x315/1050x260x260mm

播种机 SEEDER



手推播种机
HAND PUSH SEEDER

名称 NAME:	手推播种机 HAND PUSH SEEDER
型号MODEL:	8-12调可调 8-12 Adjustable
功能 FUNCTION:	播种 PLANTING
播种孔 HOLE SEEDING RATE:	1/2可调 1 OR 2 ADJUSTABLE
毛净重 G.W./N.W.:	10.5KGS/9KGS
播种深度 PLANTING DEPTH:	4-8CM
工作效率 WORKING EFFICENCY:	0.1公顷/时 0.1 HECTARE/HOUR
播种容量 SEEDS CAPACITY:	3.7KGS
种子到种子的距离 SPACE (SEED TO SEED):	15-30cm可调 15-30CM ADJUSTABLE
装箱量 LOADING QUANTITY:	400SETS



播种施肥器
DOUBLE CYLINDER SEEDER

名称 NAME:	播种施肥器 DOUBLE CYLINDER SEEDER
适用种子 SUITABLE SEEDS:	玉米，花生，棉花，葵花子等 MAIZE,BEAN,PEANUT,COTTON, SUNFLOWER SEED,ETC.
功能 FUNCTION:	播种 PLANTING
播种地势 SEED TOPOGRAPHY:	平原，山地，丘陵等 PLAIN,MOUNTAINOUS LAND,HILL,ETC.
播种孔 HOLE SEEDING RATE:	1/2可调 1 OR 2 ADJUSTABLE
播种深度 PLANTING DEPTH:	40-75MM
播种容量 SEEDS CAPACITY:	6KGS
毛净重 G.W./N.W.:	3.5KGS/3.3KGS
包装尺寸 PACKING SIZE:	200*137*820MM

采茶机/绿篱机 TEA TRIMMER/HARVESTER

电动采茶机
BATTERY TEA HARVESTER



电动绿篱机
BATTERY HEDGE TRIMMER



名称 NAME:	电动采茶机 BATTERY TEA HARVESTER	电动绿篱机 BATTERY HEDGE TRIMMER
型号 MODEL:	4CD-30A	4CD-45
功力 ELECTRICAL MACHINERY:	无刷防水 BRUSHLESS WATERPROOF	无刷防水 BRUSHLESS WATERPROOF
最大功率 MAX POWER	100KW	100KW
电压 Voltage:	24V	24V
最大转速 Max.power:	1800r/min	1800r/min
8A电池工作时间 Battery 8A working time	3h	2.5h
9A电池工作时间 Battery 9A working time	3.5h	3h
10A电池工作时间 Battery 10A working time	4h	3.5h
12A电池工作时间 Battery 12A working time	6h	5.5h
电池组 PACK AUTONOMY:	3/3.5H	2.5/3H
充电时间 CHARGING TIME:	4/6H	3.5/5.5H
电池 Battery:8A/9A/10A/12A	3h/ 3.5h/4h/ 6h	3h/ 3.5h/4h/ 6h
割幅 CUTTER WIDTH(CM):	30	45
剪刀 SCISSORS TYPE(CM):	30	40
净重 NET WEIGHT(KG):	1.55	1.6
内箱尺寸 Inner carton size:	56X23X16cm	65X22X16cm
大外箱 Big carton size（4inner carton/ctn）:	58X48X35CM	72x46x35cm

名称 NAME:	采茶机 TEA HARVESTER
型号 MODEL:	TH260/TH435
汽油机 MATCHED ENGINE:	TU26/140FA
排量 DISPLACEMENT(CC):	26/37.7
额定功率 STANDARD POWER(kw/r/min):	0.7(1.0)/5500
油箱容量 TANK CAPACITY(L):	0.6/0.7
毛净重 G.W./N.W.(KG):	12/11.5



采茶机
TEA HARVESTER TH35

除草机 LAWN TRIMMER / WEEDER / TILLER



LAWN TRIMMER
STG-160



WEEDER & TILLER 2 IN 1
1E48F

LAWN TRIMMER	STG-160
Drive Type	Hand Push
Engine Type	4 Stroke LF1PH70FV
Cylinder Diameter	70 × 45 mm
Displacement	173 cc
Max. Power (kW / r/min)	4.1 / 3600
Fuel Consumption	395 g/kWh
Fuel Tank	2.0 L
Oil Tank	0.6 L
Height Adjustment	Three-gear adjustable and foldable
Cutting Width	560 mm (Mylon head), 410 mm (Blade)
Cutting Stubble Height	20–70 mm
Deck Material	Steel
Front / Rear Wheel	14" / 4 inch
Net Weight	39 kg
Packing Size	87.5 × 58 × 58 cm
Loading Qty (1 *20FT/40HQ)	105 / 215 units

WEEDER & TILLER 2 IN 1 1E48F	
Power Type	2 Stroke
Engine	1E48F
Displacement	63 cc
Fuel Tank Capacity	1.8 L
Mixed Fuel Ratio	25 : 1
Max. Power (kW / r/min)	2.7 / 6800
Net Weight	37 kg
Plow Width	42 cm
Deep Tillage	12 cm
Blade	Tiller / Weeder, 2 Set
Package Size	69 × 45 × 61 cm

电动修剪机 / 链锯 BATTERY TRIMMER / CHAIN SAW



SC5802







8602

SC-8603

SC5802	
Battery	21V / 4Ah
Power	400 W
Cutting Diameter	100 mm
Blade Guide	4" - 6.8"
Chain Speed	11 m/s
Chain Sprocket	7 Teeth
Machine Weight	1.5 kg
Battery Weight	0.6 kg
Package	4 pcs
Carton Size	50 × 48 × 33.5 cm

8602	
Cutting Diameter	0–30 mm
Weight	1.2 kg
Max. Power	600 W
Battery	21V / 2Ah
Battery Pack Autonomy	3–4 h
Charging Time	2–2.5 h
Temperature Range	–10...50°C
Package	6 pcs
Carton Size	48 × 34 × 31.5 cm

SC-8603	
Cutting Diameter	0–28 mm
Weight	0.9 kg
Max. Power	500 W
Battery	18.6V / 2Ah
Battery Pack Autonomy	2–3 h
Charging Time	1.5–2 h
Temperature Range	–10...50°C
Pruning Shear Package	10 pcs
Pruning Shear Carton Size	59 × 24 × 29 cm
Shaft	Telescopic: Range 1.5–2.1 m
Shaft Package	4 pcs
Shaft Carton Size	125 × 15 × 18 cm

绿篱机/链锯 HEDGE TRIMMER / CHAIN SAW



SLP600



SLP750



CHAIN SAW



名称 NAME	绿篱机 HEDGE TRIMMER	
型号 MODEL	SLP600	SLP750
汽油机 MATCHED ENGINE	1E32FL	
排量 DISCHARGING CAPACITY (cc)	22.5	
最大功率 MAX. POWER (kW/rmin)	0.65/7500	
燃油混合比 MIXED FUEL RATIO	25:01:00	
油箱容积 FUEL TANK CAPACITY (L)	0.6	
修剪宽度 TRIMMING WIDTH (mm)	600	750
剪刀 SCISSORS TYPE	dual back and forth	
毛重 G.W. (KG)	7	7.3
包装尺寸 PACKING SIZE (cm)	110×24×25	115×27×26
装箱量 1×20' QTY	478	400

名称 NAME	油锯 CHAIN SAW
型号 MODEL	CS4500/5200/5800
汽油机 ENGINE TYPE	风冷2冲 AIR COOLED / 2 STROKE
排量 DISPLACEMENT (CC)	45/52/58
油箱 FUEL TANK CAPACITY	550ML
机油箱 ENGINE OIL TANK CAPACITY	260ML
功率 ENGINE POWER (KW)	1.7/2.2/2.4
汽油机油比 GAS/OIL RATIO	25:01:00
导板 CHAIN BAR SIZE	16"/18"/20"
怠速 IDLE SPEED	3000 ± 200RPM
包装尺寸 PACKING SIZE (CM)	48*26*30
净重量 N.W./G.W. (KGS)	6.8/7.8
装箱量 LOADING QTY (1×20' FT/40' HQ)	750/1815UNITS

舷外机 OUTBOARD MOTOR

HYAGRO



XWJ170





XWJ63

名称 NAME	舷外机 OUTBOARD MOTOR		
型号 MODEL	XWJ52	XWJ63	XWJ170
发动机型号 ENGINE MODEL	1E44F-2A	1E48F	170F
排量 DISCHARGING CAPACITY (CC)	52	63	170
最大功率 (HP) MAX. POWER (HP)	1.9	3	7
燃油比 MIXED FUEL RATIO	25:1 for 2 stroke		
油箱容积 FUEL TANK CAPACITY (L)	1.3	1.8	3.6
减速比 GEAR RATIO	2.08		1.47
叶轮直径 PROPELLER DIAMETER (MM)	180.00		200.00
铝管直径 DIAMETER OF ALUMINIUM PIPE (MM)	28		40
螺旋桨材质 THE MATERIAL FOR IMPELLER	aluminum (insert is 304 stainless steel)		
手柄 THE HANDLE	360 degree turning		
包装尺寸 PACKAGE SIZE (CM)	111×34×32		115×37×49
装箱量 LOADING QTY (20FT/40HQ)	248/584		144/350



WP35



WP43



WP328

型号 MODEL:	WP35	WP43	WP328
型号 TYPE:	自吸式 SELF PRIMING	自吸式 SELF PRIMING	自吸式 SELF PRIMING
流量 FLOW (M^3/H):	8	12/18	5
扬程 LIFT (M):	30	35	30
吸程 SUCTION LENGTH (M):	8	8	8
发动机 MATCHED ENGINE:	140FA	1E40F-5A	1E36F
排量 DISPLACEMENT (CC):	37.7	42.7	30.5
最大功率 MAX POWER (KW/R/MIN):	1.0/6500	1.25/6500	0.85/6000
进出水口尺寸 INLET / OUTLET SIZE(INCH):	1	1/1.5	1
燃油箱容量 FUEL TANK CAPACITY (L):	0.7	1	1.6
净重 NET WEIGHT (KG):	8	8	7.4
包装 PACKAGING (MM):	390×280×390	400×300×340	350×230×444
装柜量 LOADING QTY (1*20FT):	720	710	820
2 冲程 2 STROKE ENGINE:		●	●
4 冲程 4 STROKE ENGINE:	●		



WP142



FP52



WP411 2 IN 1



型号 MODEL:	WP142	WP411	FP52
型号 TYPE:	自吸式 SELF PRIMING	离心泵 CENTRIFUGAL PUMP	离心泵 CENTRIFUGAL PUMP
流量 FLOW (M^3/H):	25	15	25
扬程 LIFT (M):	12	35	12
吸程 SUCTION LENGTH (M):	18	8	18
发动机 MATCHED ENGINE:	144	1E40F-6	TB52
排量 DISPLACEMENT (CC):	49	40.2	51.7
最大功率 MAX POWER (KW/R/MIN):	1.2/6000	1.45/7000	1.4/6500
进出水口尺寸 INLET / OUTLET SIZE(INCH):	1.5	1.5	1.5
燃油箱容量 FUEL TANK CAPACITY (L):	1.2	1	1
净重 NET WEIGHT (KG):	9.2	9.5	8
包装 PACKAGING (MM):	605×365×330	410×310×430	610×360×280
装柜量 LOADING QTY (1*20FT):	378	550	520
2 冲程 2 STROKE ENGINE:		●	●
4 冲程 4 STROKE ENGINE:	●		